Engineering progress
Enhancing lives

SLINOVA HWF®

Technical information
Profile print

REHAU

Table of contents

2 01 Frame profiles

5 02 Sash profiles

6 03 Interlock profiles

7 04 Moulded parts

8 05 Track and Seals

9 06 Hardware


12 07 Drilling jigs

13 08 Threshold

15 09 Reinforcements


14 10 Pictograms/abbreviations

01 Frame profiles

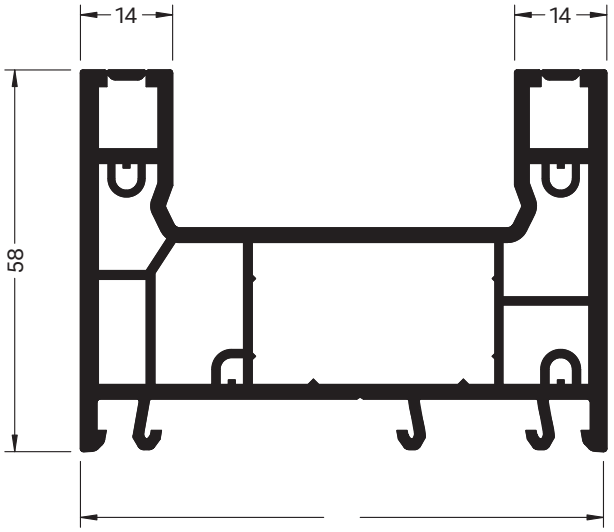


Frame profile 58/80 PULS SLINOVA®
1575602
1595602
1595702

80





35 x 20


	1357865	1357836	1357863	1357834
	1.5	1.5	2.5	2.5
Ix	2.3	2.3	3.4	3.4
Iy	0.98	0.98	1.4	1.4
ZN	140	275	140	275
	6	6	6	6

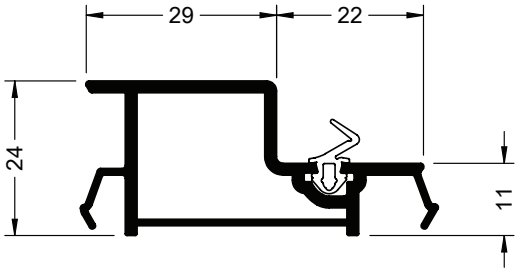


Infill profile SLINOVA®
1575626
54
1595626
27







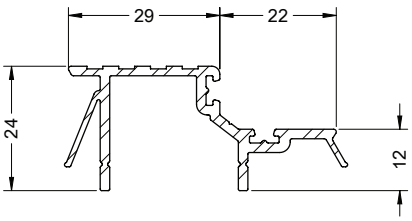

Tread plate SLINOVA®
Aluminium
1357843
6









1375318

© REHAU 753100DE/en Y 5356 09.2022

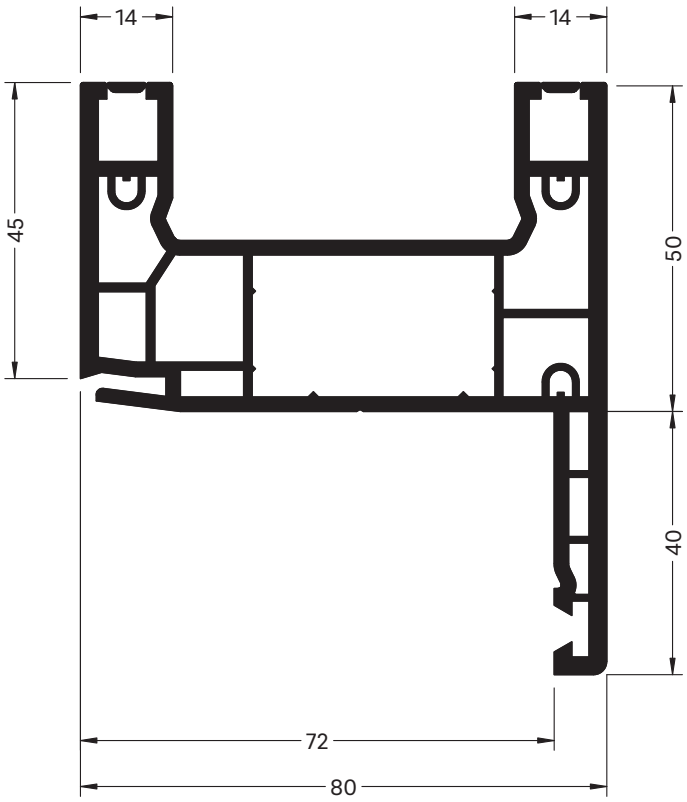


Renovation frame profile SLINOVA®
1575604
1595604
1595704




35 x 20

	1357865	1357836	1357863	1357834
	1.5	1.5	2.5	2.5
Ix	2.3	2.3	3.4	3.4
Iy	0.98	0.98	1.4	1.4
ZN	140	275	140	275
	6	6	6	6

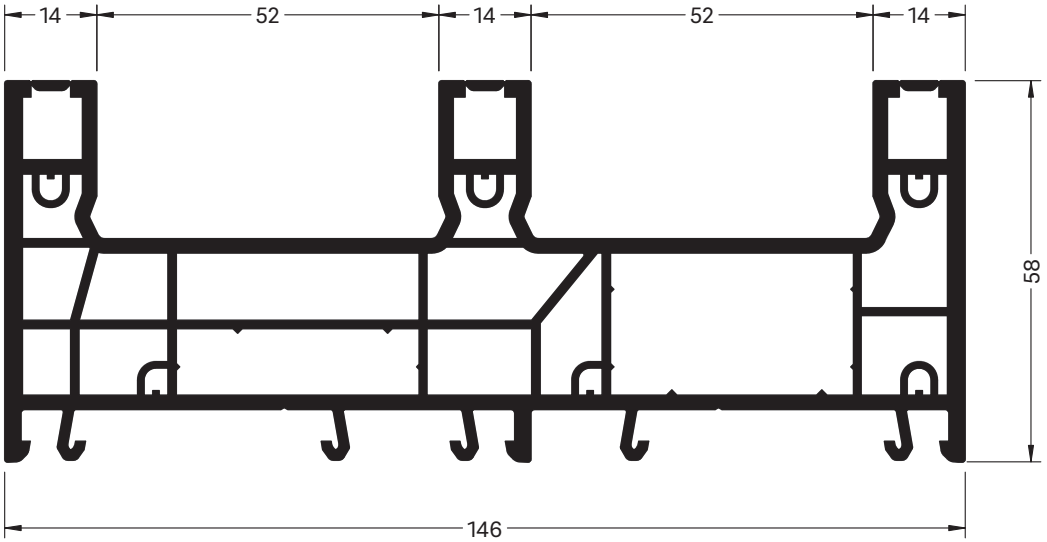


Frame profile 58/146 SLINOVA®
1575603
1595603
1595703

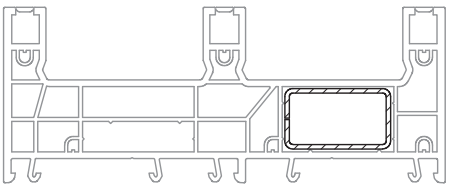

35 x 20

	1357865	**1357836**	**1357863**	**1357834**
	1.5	1.5	2.5	2.5
Ix	2.3	2.3	3.4	3.4
Iy	0.98	0.98	1.4	1.4
ZN	140	275	140	275
	6	6	6	6

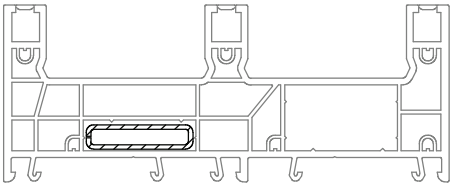


35 x 8


	1357864	**1357835**
	1.5	1.5
Ix	1.3	1.3
Iy	0.11	0.11
ZN	140	275
	6	6

© REHAU 753100DE/en Y 5356 08.2022

02 Sash profiles

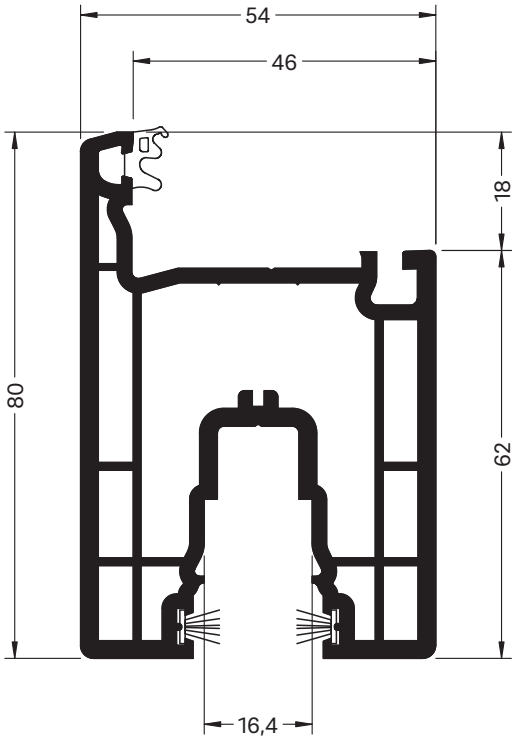


Sash 80 PULS SLINOVA®
1575305
1595305




34,5 x 40,8

	1358960	1358939
	1,5	1,5
I_x	3,4	3,4
I_y	2,8	2,8
ZN	140	275
	6	6



34,5 x 40,8


	1357860	1357832
	2	2
I_x	5,4	5,4
I_y	4,6	4,6
ZN	140	275
	6	6




34,5 x 40,8 (stulpseitig und im Mittelschluss)


	1357862	1357833
	2,5	2,5
I_x	8,0	8,0
I_y	6,4	6,4
ZN	140	275
	6	6

03 Interlock profiles

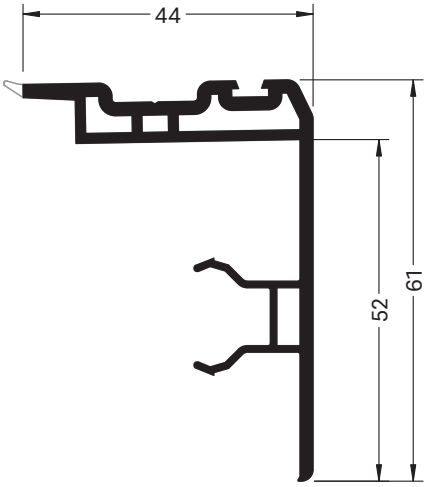


Sash 80 interlock SLINOVA®
1575506
1595506







1375318

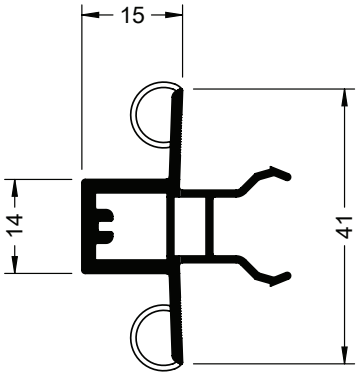


Interlock mullion bar SLINOVA®
1575507






© REHAU 753100DE/en Y 5356 09.2022


04 Moulded parts




Sash 80 interlock end cap SLINOVA®
PP GF / TPE
1375308
10




Sash 80 end cap SLINOVA®
ASA
1375408
10

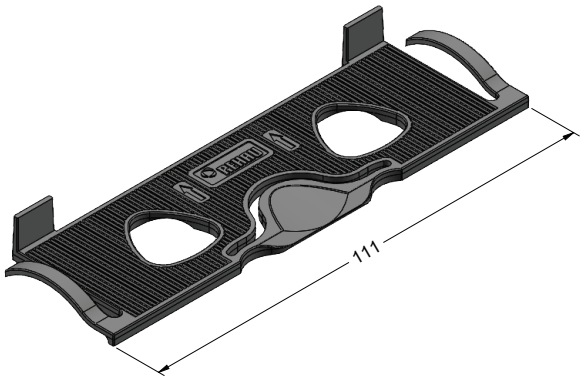

Sash 80 glazing wedge SLINOVA®
PP GF
1375310
500

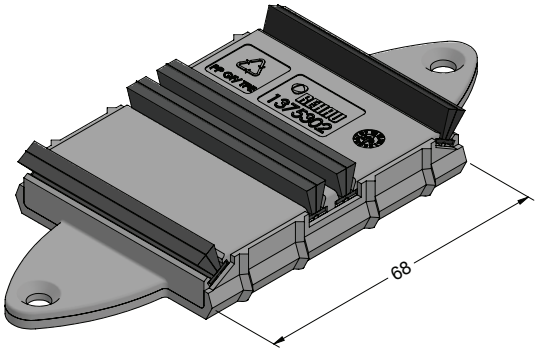


Filler piece SLINOVA®
PP GF / TPE
1375302
10

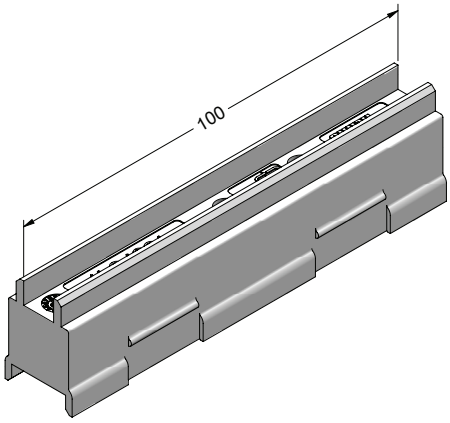


SLINOVA® sash spacer
PP
1357849
50

05 Track and Seal




Push-in track, round SLINOVA®
Aluminium
1357837
200




Brush seal 5.1 x 6 WF
(for use in 1575305, 1575506, 1357843)
PP
1375318
100


06 Hardware

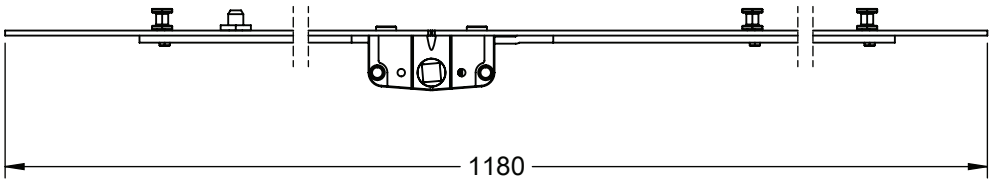

Espagnolette 1200/17 pin SLINOVA®
WRH 1,201–1,800 mm
Steel
1361101
10

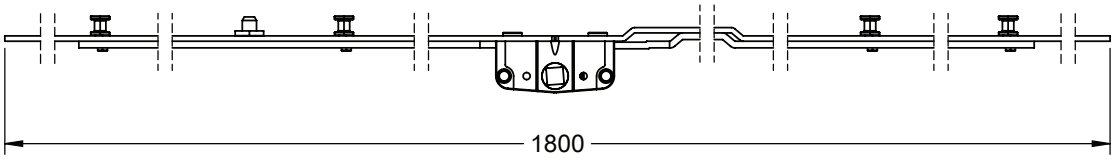


Espagnolette 1800/17 pin SLINOVA®
WRH 1,801–2,X00 mm (X = max. WRH)
Steel
1361102
10

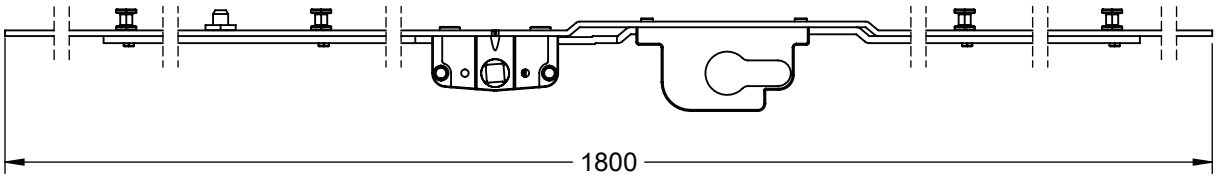


Espagnolette 1800/17 PZ pin SLINOVA®
WRH 1,801–2,X00 mm (X = max. WRH)
Steel
1361103
10


© REHAU 753100DE/en Y 5356 09.2022

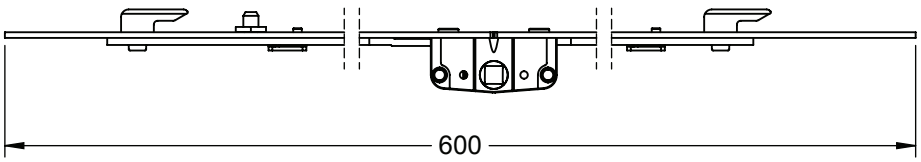


Espagnolette 600/17 hook SLINOVA®
WRH 600–1,800 mm
Steel
1361104
10

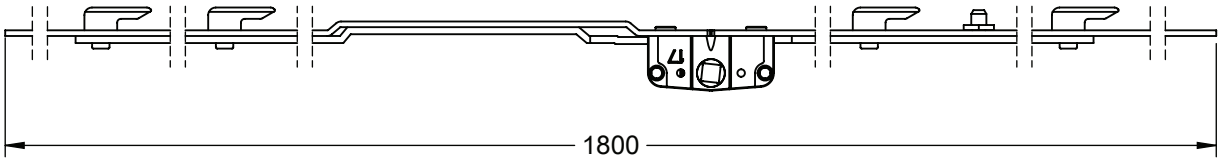


Espagnolette 1800/17 hook SLINOVA®
WRH 1,801–2,X00 mm (X = max. WRH)
Steel
1361105
10

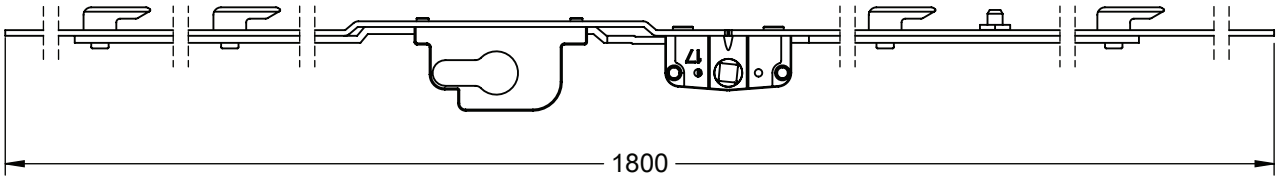

Espagnolette 1800/17 PZ hook SLINOVA®
WRH 1,801–2,X00 mm (X = max. WRH)
Steel
1361106
10




Striker plate SLINOVA®
ZDG
1361107
100

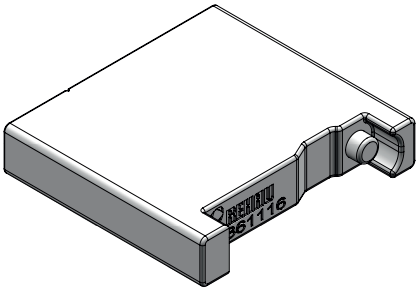


Striker plate jig SLINOVA®
1361116
1
Available in Q3 2022




Sash stop set SLINOVA®
ZDG
1361108
1361109
1361111
20



Rubber plug SLINOVA® (for sash stop)
TPE
1361112
20

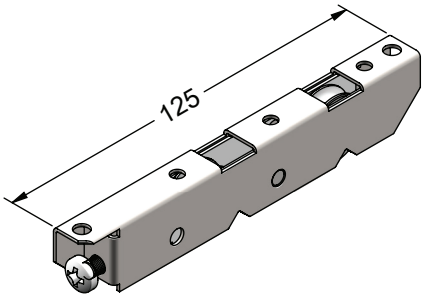

Roller SLINOVA®
1361113
40




Roller spacer SLINOVA®
1361114
120


Roller	Spacers	Max. sash weight
2 x 1361113	–	90 kg
2 x 1361113	4 x 1361114	120 kg
2 x 1361113	6 x 1361114	140 kg

© REHAU 753100DE/en Y 5356 09.2022


07 Drilling jigs

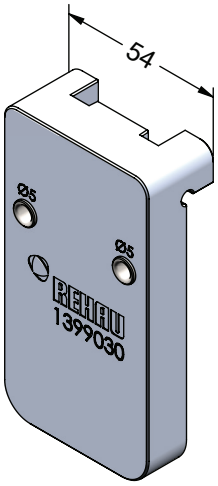


Sash 80 fitting groove end cap drilling jig
1399030
1

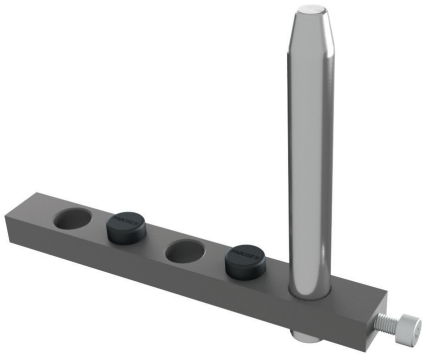

Roller drilling jig SLINOVA®
1361115
1

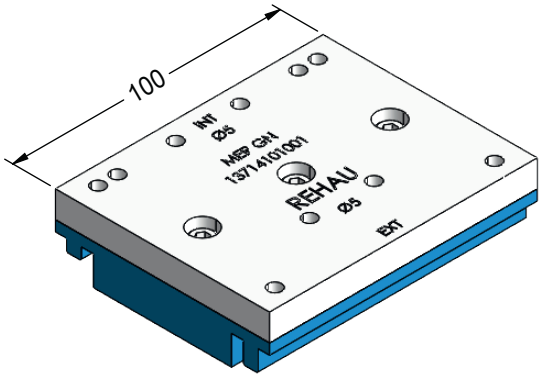

Drilling jig threshold
SLINOVA®/SLINOVA X®
Blue
1371410
1

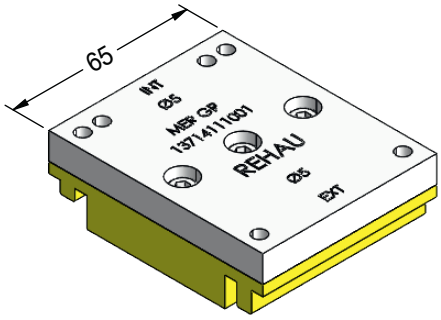


Drilling jig threshold RF
SLINOVA®/SLINOVA X®
Yellow
1371411
1

© REHAU 753100DE/en Y 5356 09.2022


08 Threshold

08.01 Low threshold

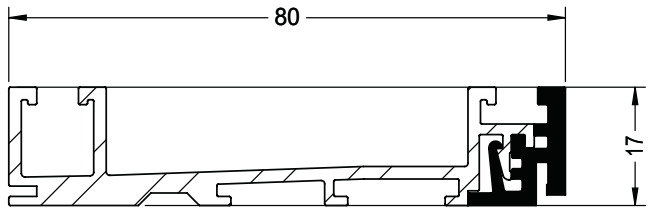


Threshold 80 SLINOVA®/SLINOVA X®
E6/EV1
1371400
64

08.02 Threshold holder

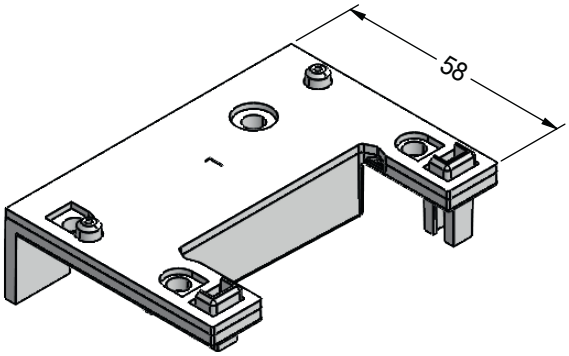


Set threshold holder for frame 58/80
SLINOVA®/SLINOVA X®
(Set contains 2 holders - left and right version)
PC-ABS
1371403
150

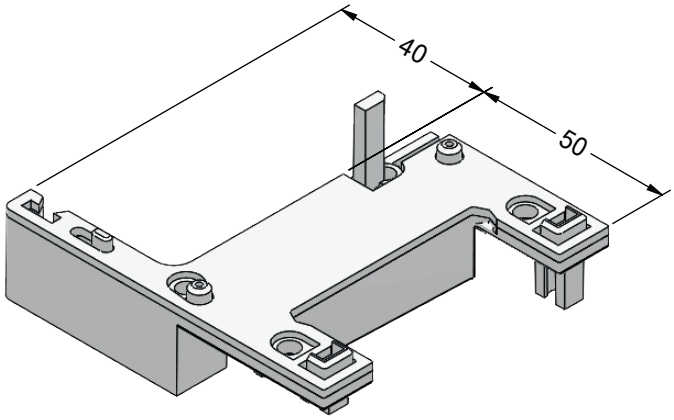


Threshold holder RF
SLINOVA®/SLINOVA X®
(Set contains 2 holders - left and right version)
PC-ABS
1371404
100

08.03 Filler pieces interlock and drain bridges

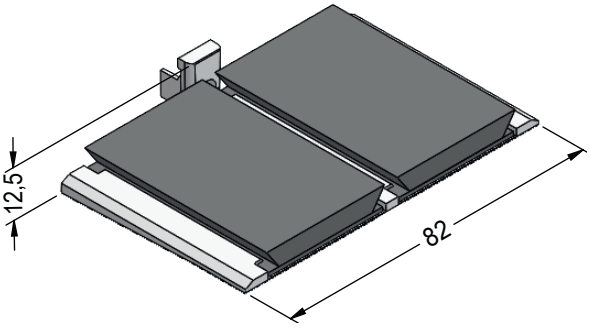


Filler piece interlock threshold
SLINOVA®
PC-ABS
1371407
270

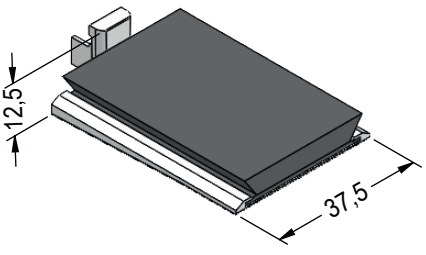


Filler piece interlock threshold
SLINOVA X®
PC-ABS
1371419
540


© REHAU 753100DE/en Y 5356 09.2022



Drain bridge 2F
SLINOVA®/SLINOVA X®
PC-ABS
1371420
1500

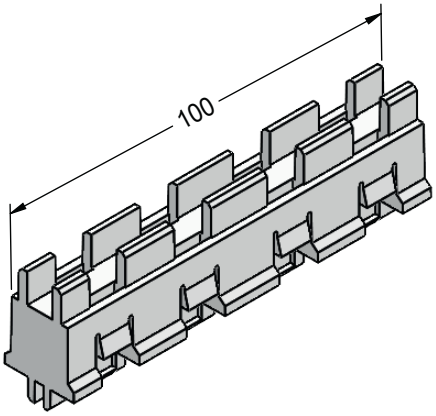

Sash spacer threshold
SLINOVA®
PC-ABS
1371408
60

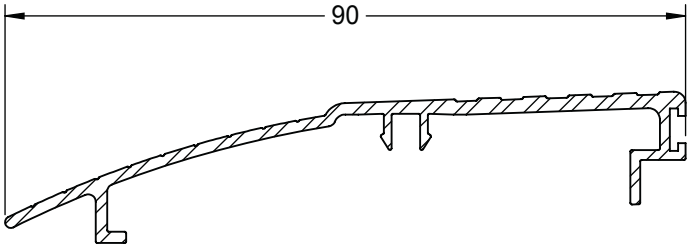


Access ramp
Alu
1371402
80





1357854
for SLINOVA®


© REHAU 753100DE/en Y 5356 09.2022

09 Reinforcements

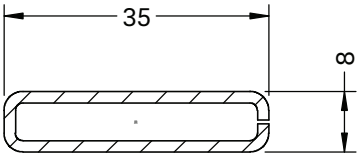

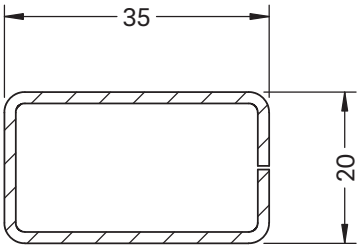

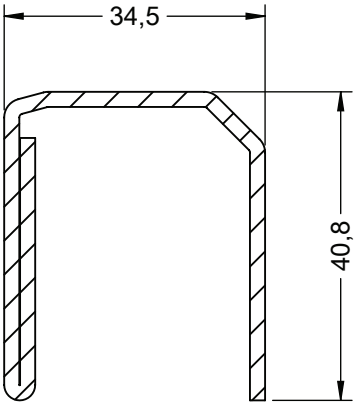

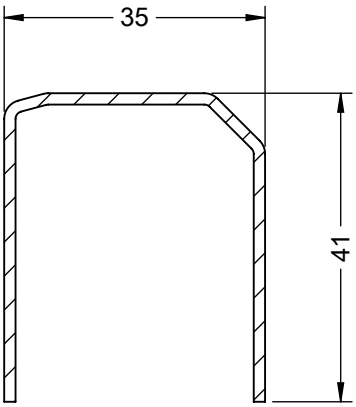

Article no.		I_x	I_y	ZN
1357864	1.5	1.3	0.11	140
1357835	1.5	1.3	0.11	275
1357865	1.5	2.3	0.98	140
1357836	1.5	2.3	0.98	275
1357863	2.5	3.4	1.4	140
1357834	2.5	3.4	1.4	275
1357860	2	5.4	4.6	140
1357832	2	5.4	4.6	275
1358960	1,5	3,4	2,8	140
1358939	1,5	3,4	2,8	275

© REHAU 753100DE/en Y 5356 09.2022

10 Pictograms/abbreviations

	Colour: black
	Anthracite grey RAL 7016
	Colour: grey
	Colour: silver
	Colour: white
	Colour: cream white
	Natural anodised aluminium
	Laminated version on one side
	Laminated version on one side
	Laminated version on both sides
@	Non-standard, delivery time on request
	Packaging unit (for details, see article directory)
	Wall thickness in mm
	With weldable gasket
	Right-hand version
	Left-hand version
	Roll-in seal
$I_{x,\ steel\ elas}$	I_x of a cross-section relative to modulus of elasticity of steel
FFH	Sash rebate height

This document is protected by copyright. All rights based on this are reserved. No part of this publication may be translated, reproduced or transmitted in any form or by any similar means, electronic or mechanical, photocopying, recording or otherwise, or stored in a data retrieval system

Our verbal and written advice with regard to usage is based on years of experience and standardised assumptions and is provided to the best of our knowledge. The intended use of REHAU products is described comprehensively in the technical product information. The latest version can be viewed at www.rehau.com/TI. We have no control over the application, use or processing of the products. Responsibility for these activities therefore remains entirely with the respective user/processor. Where claims for liability nonetheless arise, they shall be governed exclusively according to our terms and conditions, available at www.rehau.com/conditions, insofar as nothing else has been agreed upon with REHAU in writing. This shall also apply for all warranty claims, with the warranty applying to the consistent quality of our products in accordance with our specifications. Subject to technical changes.

www.rehau.com/locations

© REHAU Industries SE & Co. KG
Rheniumhaus
95111 Rehau

753100DE/en 09.2022